





# **NATIONAL<sup>®</sup>** **PAINTS**

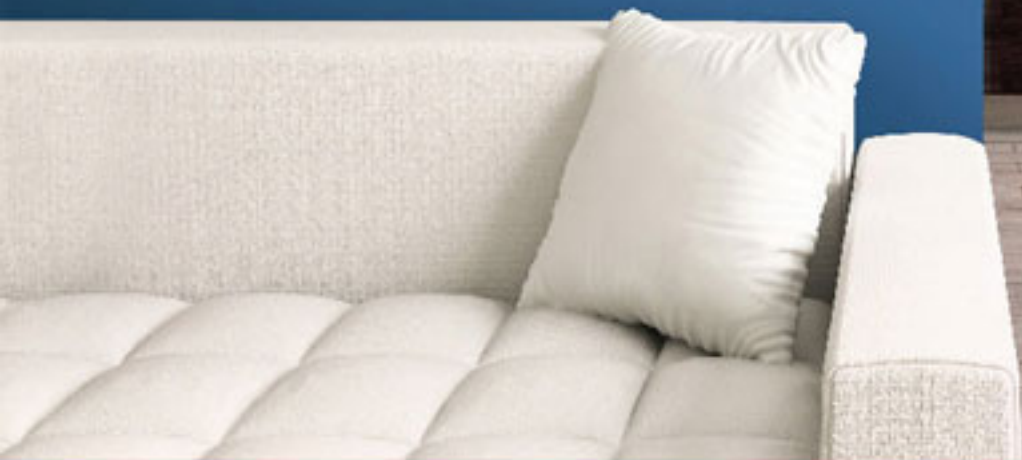


## **EMULSIONS**

Environmentally friendly  
with anti-fungal & anti-bacterial additives

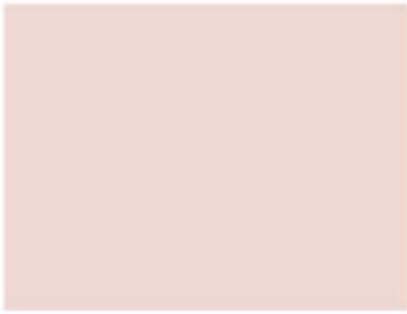

804 CANDY FLOSS

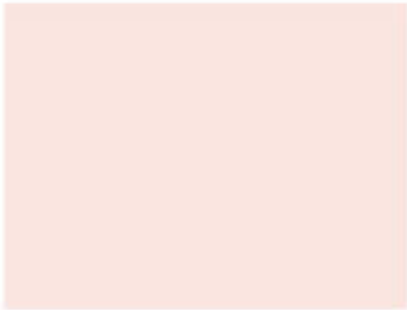

666 POWDER PINK



674 SOFT PINK



625 ROSE



624 LILAC



678 CAPRICE



807 DEEP CREAM



744 GOLDEN BROWN



733 BRICK RED



808 PEANUT BUTTER



720 TILE CORAL



638 POPPY



394 PEACH MELBA



755 BRACKEN



759 MAROON



395 CLEMENTIN



# أصباغ ناشونال المائية (إملشن) National water based paints (Emulsions)



802 BROKEN WHITE



801 OFF WHITE



833 LIGHT YELLOW




803 MAGNOLIA




805 MUSHROOM



840 TEXAS CREAM

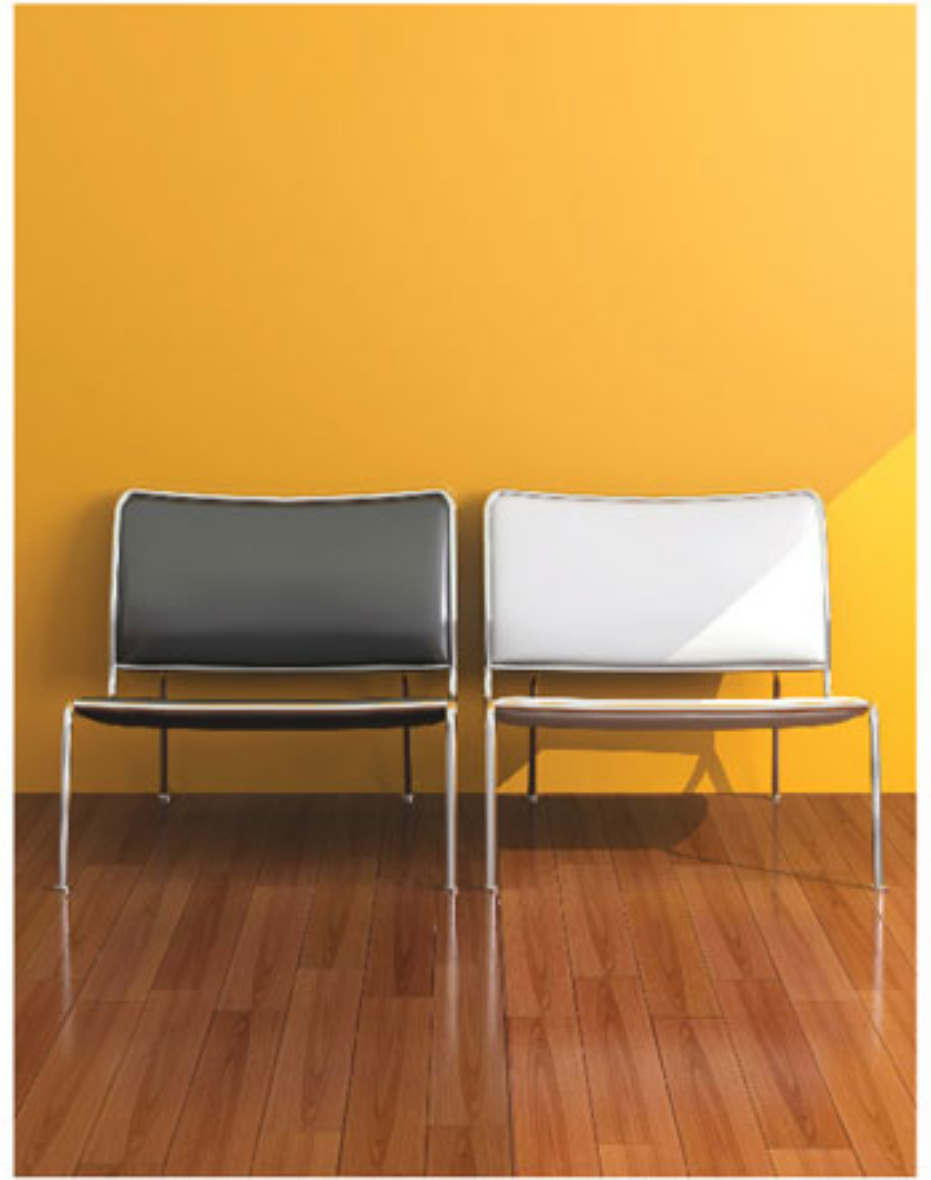

834 PALE CREAM

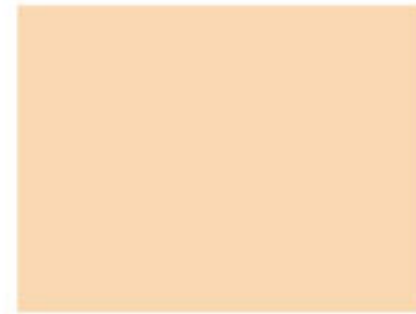

806 CREAM



310 SUN YELLOW



320 LEMON



200 DYRO GREY



480 STEEL BLUE



202 SILVER GREY



230 TWEED GREY



402 DANUBE BLUE



405 PURITY BLUE



403 MARVIK BLUE



430 TROPEZ BLUE



463 POWDER BLUE




461 BERMUDA BLUE



438 SKY BLUE



426 NATIONAL BLUE

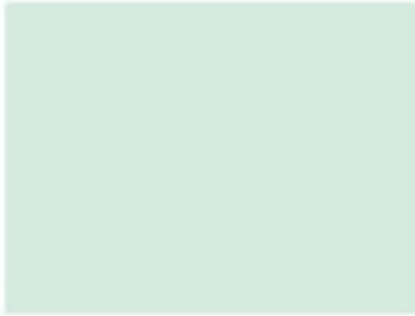

501 BRILLIANT GREEN



518 IMPERIAL GREEN



526 ORIGINAL



527 TORNADO



507 PASTEL GREEN



522 AQUAMARINE



564 GARDEN GREEN



557 SPRING GREEN





# NATIONAL<sup>®</sup> PAINTS

## Description:

National water based paints (Emulsions) are environmentally friendly (Low VOC), based on high quality pure acrylic and copolymer emulsion.

## Characteristics:

- Weather and alkali resistant (for exterior application)
- Gives smooth finish (Matt, Silk, Gloss)
- Easy to apply and fast to dry
- Excellent coverage

## Recommended Use:

It can be used on concrete, plaster, gypsum and wooden surfaces.

## Theoretical Spreading Rate:

7.5-10.5 m<sup>2</sup> / litre depending on application method, nature of surface, film thickness etc.

## Application Method and Thinning:

Roller, brush or spray. For thinning add 10-15 % water if necessary.

## Drying Time:

Touch dry : 30 minutes to 1 hour.

## Colors:

Specific colors other than our standard shades can be created through National Computerized Colors Tinting System that offers a wide selection of shades (other than National Plastic Emulsion and National Acrylic Emulsion I).

## Note:

For further information on surface preparation and suitable system, please refer to National Technical Data Sheets.

## الوصف:

أصباغ ناشونال - مائية الأساس (إملشن)، هي أصباغ صديقة للبيئة تحتوي على بوليمرات عالية الجودة، ذات أساس اكريليك نقي وكوبوليمر إملشن.

## المميزات:

- مقاومة الظروف الجوية والقلويات (للاستعمال الخارجي)
- تعطي مظهر نهائي أملس (مات، سلك، جلوس)
- سهولة الاستعمال وسريعة الجفاف
- معدل تغطيه ممتاز

## الإستعمالات:

يوصى باستعمالها فوق الأسطح الخرسانية، القصارة، الأسطح الجبسية والخشبية.

## معدل التغطية النظري:

7.5 - 10.5 م<sup>2</sup> / لتر يعتمد على طريقة الاستعمال، طبيعة السطح وسماكة طبقة الصبغ الخ.

## طريقة الاستعمال والتخفيف:

يمكن استخدامها بواسطة الفرشاة، الرول أو مسدس الرش ويمكن التخفيف بإضافة الماء بنسبة 10 - 15 % عند الضرورة.

## زمن الجفاف:

الجفاف عند اللمس : 30 دقيقة الى 1 ساعة.

## الألوان:

نضمن لكم قدرتنا على إنتاج ألوان خاصة ومحددة غير الألوان القياسية من خلال استخدام تقنية جهاز ناشونال لخلط وتحضير الألوان بواسطة الكمبيوتر التي تمكننا من إنتاج مجموعة واسعة من الألوان المختارة (باستثناء ناشونال بلاستيك إملشن وناشونال أكريل إملشن 1).

## ملاحظة:

لمزيد من المعلومات عن تحضير الأسطح ونظام الصبغ المناسب يرجى الرجوع الى المواصفات الفنية لمنتجات أصباغ ناشونال.


[www.kbmtools.com](http://www.kbmtools.com)

This product is available and can be ordered from KBM Tools.

Feel free to contact:

**Al Khidma Bldg Mat Trading LLC**  
**Al Zubair, Sajja.**  
**Sharjah. United Arab Emirates**  
**06 5361999**  
**[sales@kbmtools.com](mailto:sales@kbmtools.com)**  
**[www.kbmtools.com](http://www.kbmtools.com)**

**KBM TOOLS**<sup>®</sup>  
BUILDING MATERIALS

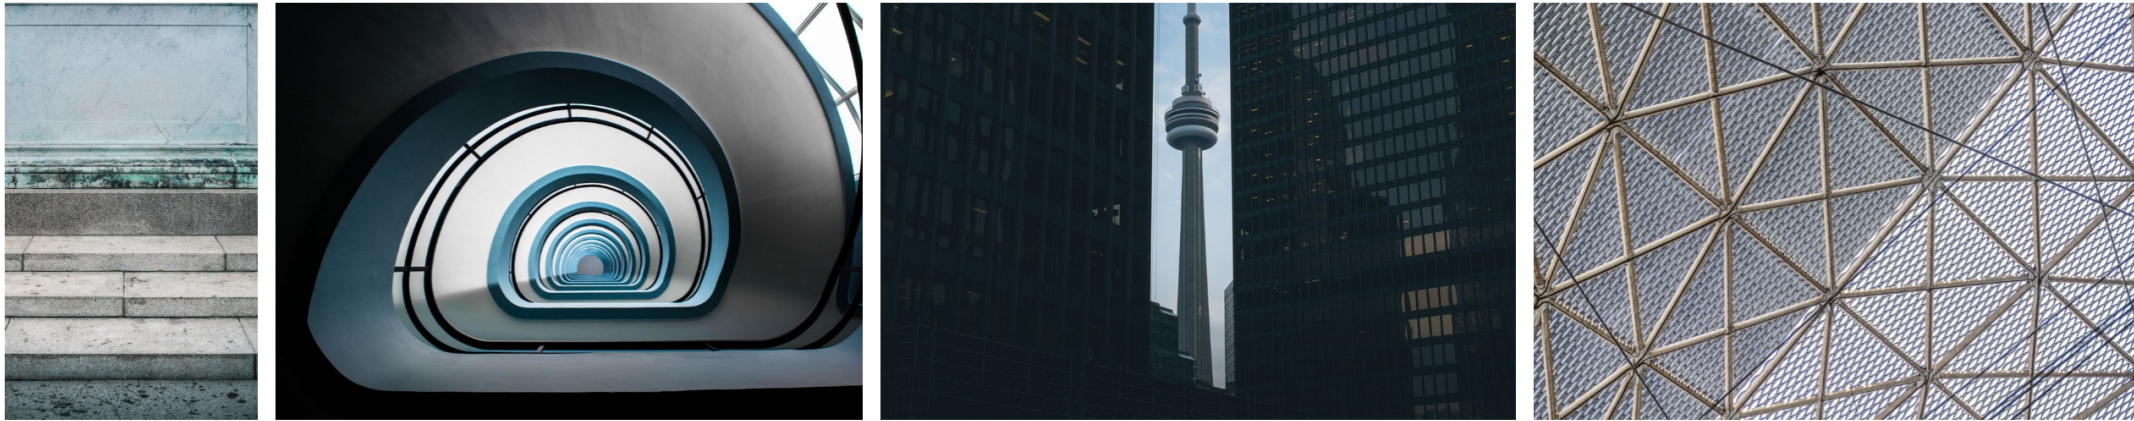

build your dreams



with KBM Tools